

## 15.6" Industrial Touch Panel PC with 10th/11th Gen Intel® Core™ i Processor

### Overview


The DPC-8156 is a fanless 15.6" industrial panel PC that supports 10th/11th generation Intel® Core™ i5 processors for high-performance computing. It features a modular design to allow easy CPU board or I/O board upgrades and ensures a stable system structure and reliable industrial performance. With a choice of 4:3 and 16:9 aspect ratios and optional resistive or capacitive touchscreen, the DPC-8156 provides display versatility. The aluminum alloy IP65-rated front panel, metal body, and excellent heat dissipation offer longevity, functionality, and rust resistance for industrial applications.

### Features

- 15.6" LED-backlit LCD with capacitive or resistive touch screen
- Rugged aluminum enclosure and fanless design
- 10th/11th Gen Intel® Core™ i5 processor
- 3 x COM, 4 x USB, 4 x LAN, 1 x HDMI
- Supports VESA 100 mount and panel mount
- IP65 compliant front panel



### I/O Interfaces

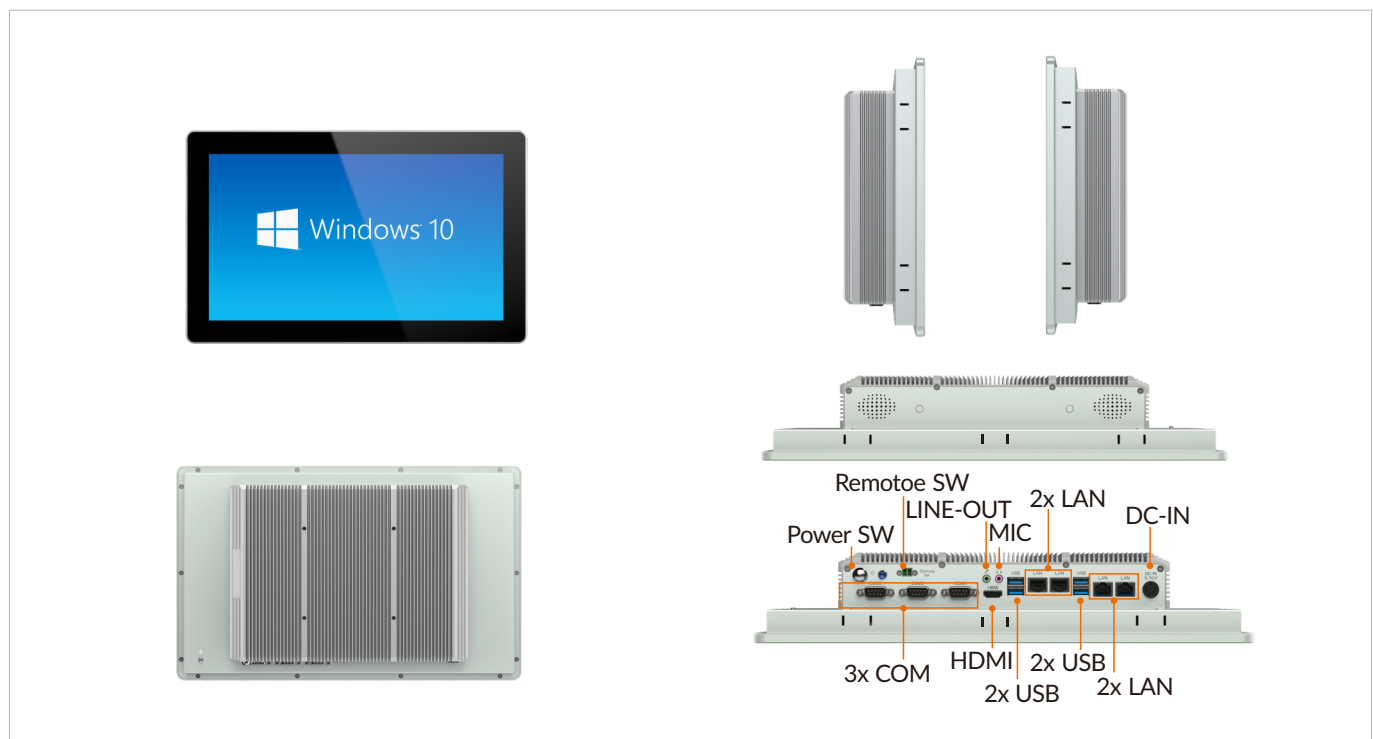

## Specifications

Display	DPC-8156-10210U	DPC-8156-1135G7
Size	15.6 inch	
Touch Type	5-wire resistive touch/projected Capacitive multi touch (optional)	
Transmittance	87% (capacitive) / 80% (resistive)	
Control Interface	USB	
Surface Hardness	≥7H/≥3H	
Resolution	1920 x 1080	
Luminance	450 nits	
Contrast Ratio	1000: 1	
View Angles	85 (left), 85 (right), 85 (up), 85 (down)	
LED Lifetime	50,000 hrs	
Color	16.7M	
<b>System</b>		
CPU	Intel® Core™ i5-10210U(1.6 GHz) quad-core eight-thread processor	Intel® Core™ i5-1135G7 (2.4 GHz) quad-core eight-thread processor
Memory	2 x DDR4 2666 SO-DIMM (up to 64GB)	2x DDR4 3200 SO-DIMM (up to 64GB)
Storage	1 x 2.5" SATA HDD/SSD (optional) 1 x full length Mini PCIe for mSATA SSD	
<b>I/O Ports</b>		
USB	4 x USB 3.0	
Serial	3 x COM (COM1 supports RS-232, COM2 and COM3 support RS-232/422/485)	
Ethernet	4 x GbE LAN	
Display	1 x HDMI	
<b>Expansion Slot</b>		
Mini PCIe	1 x full length Mini PCIe for Wi-Fi 1 x full length Mini PCIe for mSATA	
<b>RF Communication</b>		
Wi-Fi	Mini PCIe expansion (optional)	
Cellular	Mini PCIe expansion (optional)	
Bluetooth	Mini PCIe expansion (optional)	
<b>Audio</b>		
Audio	Mic in, line out	
Speaker	2Ω5W speaker	
<b>Power</b>		
Button	Yes	
Remote Power On/Off	1 x Remote switch connector	
DC Input	9 to 36VDC	
Power Connector	M8	
Power Consumption	27W	29W
Ignition On/Off	1 x AC loss	
Power Adaptor	AC-DC, 12V@7.5A, 90W	
<b>Operating System</b>		
Windows	Windows 10, Windows 11	
<b>Mechanical</b>		
Dimensions (W x D x H)	399 x 249 x 73 mm (15.7 x 9.8 x 2.9 inches)	
Weight (N.W.)	5.5 kg (12.12 lbs)	
Mounting	Panel mount, wall mount bracket VESA 100	
Material	Aluminum alloy panel, all-metal chassis	

Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	10% to 95% @ 40°C (104°F), non-condensing
Vibration	5-500Hz, 0.026 G <sup>2</sup> /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (for front panel)
Certification	
EMC	CE, FCC
Packing List	
Packing	1 x DPC-8156 1 x AC-DC power adapter 10 x panel mounting buckles 1 x warranty card

## Dimensions

