EIS-2206B 2U 19" Rackmount Industrial Server with Intel® C612

Brief Introduction

EIS-2206B is an industrial server based on Intel® C612 platform. It supports dual socket Intel® Xeon® E5-2600 V3/V4 series processor. EIS-2206B support onboard LSI RAID, professional IPMI remote management and multiple OS including: WinServer 2008R2, WinServer 2012R2, WinServer2016, Vmware vSphere 5.5 update 3 and above, RedHat® Enterprise Linux, Cent OS Linux and etc. EIS-2206B is built by high quality sheet metal structure which ensure high reliability operation environment with good thermal design and vibration resistance performance.

EIS-2206B is widely used in enterprise WEB application, printing, virtualization, information secury, and surveillance.



Features

Based on Intel® C612

Support dual socket Intel® Xeon® E5 2600 V3/V4 CPU


Support 16 x DDR4 DIMMs, up to 1TB RDIMM ECC

Support 6 x PCIE expansion

Support 8 x 3.5" HDD bay drawable, 2 x 2.5" SSD bay internal

Support ATX and redundant PSU

Product size chart

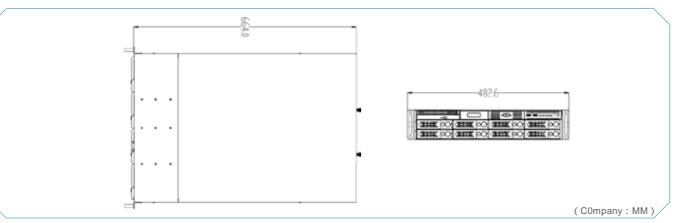

Specifications

| opcomo | | |
|--------------|---------------------------|--|
| Items | | |
| System | CPU | Support dual socket Intel® Xeon® E5-26 |
| oystem | Chipset | Intel® C612 |
| Memory | | 16 x 288PIN DDR4 DIMMs, support RDI Up to 512GB (RDIMM), 2TB (LRDIMM) |
| Storage | SATA | 8 x 3.5" drawable SATA/SAS bay 2 x 2.5" HDD/SSD internal |
| | ODD | 1 x slim DVD-ROM optional |
| LAN | | 2 x 10/100/1000Mbps RJ45, LAN1 support X IPMI, support Wake-On-Lan and system |
| Expansion | | 2 x PCIEx16, support half-size add-on ca 4 x PCIEx8, support half-size add-on car |
| I/O | VGA | 1 x VGA |
| | COM | 1 x DB9 RS232 |
| | USB | 4 x USB 3.0, 2 x USB 2.0 |
| | IPMI | 1 x IPMI |
| LCD Module | | Support information display including: CI |
| Power Supply | | AC 110V ~ 240V, support ATX and redur |
| Mechanical | Dimensions (W x H x D) | 482.6 x 88 x 664 mm |
| | Weight | 19.75kg |
| | Installation | Rack mount |
| EMC&Safety | | Meet CE, CCC |
| OS Support | | WinServer 2008R2/2012R2, Linux |
| | | |

Ordering Information

| P/N | Model | |
|-------------|-----------------------|--|
| 0020-060541 | EIS-2206B barebone | EVOC 2U industrial server/C612/16 x D VGA/2 x PCIEx16/4 x PCIEx8/No PSU |
| 0010-089321 | EIS-2206B | EVOC 2U industrial server/1 x E5-2620 2 x LAN/1 x COM/1 x VGA/2 x PCIEx16 |



7 Industrial Server

| Specification |
|--|
| 00 V3/V4 series |
| |
| MM and LRDIMM |
| |
| |
| ort Wake-On-Lan tem management |
| ard d |
| |
| |
| |
| |
| PU temperature, system temperature, Vcore, fan speed |
| idant PSU |
| |
| |
| |
| |
| |
| |

Description

DIMMs/8 x 3.5" SATA bay/LSI SAS3 RAID 0,1,10/2 x LAN/1 x COM/1 x

0V3/16G RECC/2 x 1TB HDD/LSI SAS3 RAID 0,1,10/DVD-ROM/ 6/4 x PCIEx8/500W ATX

> **Parhelia B.V.** www.parheliabv.com (1)+31(0)10 741 00 28

