

- ▶ 1.3GHz system-on-chip NXP MPC8548E with e500 processor core, double precision floating point operations, integrated memory controller, DMA engine, PCI-X and PCI Express interface, Ethernet, and local I/O
- ▶ 2GB of DDR2 ECC memory, 128MB NOR flash and 2GB NAND flash
- ▶ 512KB of MRAM non-volatile memory
- ▶ Four Gigabit Ethernet ports
- ▶ Five serial ports
- ▶ USB 2.0 controller for integrating cost-effective peripherals (commercial temperature only)
- ▶ 2eSST VMEbus protocol with 320MB/s transfer rate across the VMEbus
- ▶ Board support packages for VxWorks and Linux
- ▶ Dual 33/66/100MHz PMC sites for expansion via industry standard modules with support for processor PMCs
- ▶ 8x PCI/PCI-X expansion connector for PMC/XMC expansion using the XMCspan carrier
- ▶ MVME7216E direct-connect rear transition module (RTM) for I/O routing through rear of VMEbus chassis


The Penguin Edge<sup>™</sup> MVME4100 single-board computer incorporates the NXP<sup>®</sup> 8548E processor, industry-leading storage options, extensive I/O and flexible expansion options including an on-board PMC site and up to four optional XMC sites via expansion cards.

The MVME4100, with the NXP MPC8548E system-on-chip (SoC) processor, provides a high-performance, cost-effective continuation for currently deployed VME infrastructure.

The e500 core, coupled with the current operating systems, allows for double precision floating point operations. In addition, the processor-enabled supplementary encryption engine can be leveraged to address new opportunities meeting the ever-growing demands for network privacy and data security.

The MVME4100 memory and storage options raise the bar in the embedded computing market. 2GB of DDR2 RAM is provided in SO-DIMM format. Innovative MRAM is included for truly non-volatile memory. Also included are 2GB of NAND flash, which can take the place of some rotating media or removable flash, while offering improved performance and life cycle.

High speed 2eSST protocol and extensive I/O - four Gigabit Ethernet ports, five serial ports, USB and PMC/XMC sites - round out the MVME4100 to provide maximum performance and flexibility.

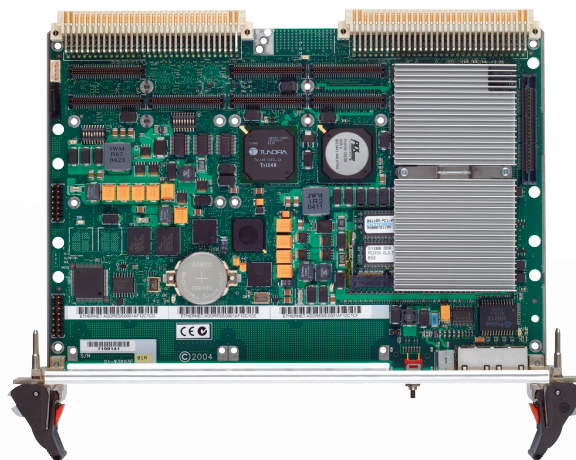



## Transition Modules

The MVME7216E transition module provides industry standard connector access to two 10/100/1000BaseT ports, and four asynchronous serial ports configured as EIA-232 DTE. All of these are via RJ-45 connectors. The MVME7216E RTM is designed to directly connect to the VME backplane in chassis with an 80mm deep rear-transition area.

## Software Support

### Firmware Monitor

The MVME4100 firmware (known as MOTLoad) is resident in the MVME4100 flash and provides power on self-test (POST enhancements available after release), initialization and operating system booting capabilities. In addition, it provides a debugger interface similar to the time proven “bug” interface on previous Penguin Edge VMEbus boards.

### Operating Systems and Kernels

The MVME4100 series supports booting a variety of operating systems including a complete range of real-time operating systems and kernels.

## Specifications

### Processor

- ▶ Microprocessor: NXP MPC8548E with e500 core
- ▶ Clock Frequency: 1.3GHz
- ▶ On-chip L1 Cache (I/D): 32K/32K
- ▶ On-chip L2 Cache: 512KB

### System Controller

- ▶ Integrated within MPC8548E

### Main Memory

- ▶ Double data rate (DDR2) SDRAM with ECC
  - Speed: DDR2-533
  - Capacity: 2GB
  - Form: SO-DIMM

## Flash Memory

- ▶ NOR flash, on-board programmable
  - Capacity: 128MB
  - Write Protection: Hardware via switch, software via register or sector lock
- ▶ NAND flash, on-board programmable
  - Capacity: 2GB
  - Write Protection: Software via register

## Non-Volatile Memory

- ▶ SEEPROM, on-board programmable
  - Capacity: 128KB (available for users), 8KB baseboard Vital Product Data (VPD)
- ▶ MRAM
  - Capacity: 512KB

## VMEbus Interface

- ▶ Compliance: ANSI/VITA 1-1994 VME64 (IEEE STD 1014), ANSI/VITA 1.1-1997 VME64 Extensions, VITA 1.5-199x 2eSST
- ▶ Controller: Tundra Tsi148 PCI-X to VMEbus bridge with support for VME64 and 2eSST protocols
- ▶ DTB Master: A16, A24, A32, A64; D08-D64, SCT, BLT, MBLT, 2eVME, 2eSST
- ▶ DTB Slave: A16, A24, A32, A64; D08-D64, SCT, BLT, MBLT, 2eVME, 2eSST, UAT
- ▶ Arbiter: RR/PRI
- ▶ Interrupt Handler/Generator: IRQ 1-7/Any one of seven IRQs
- ▶ System Controller: Yes, switchable or auto detect
- ▶ Location Monitor: Two, LMA32

## Ethernet Interface

- ▶ Controller: MPC8548E Triple Speed (TSEC) Ethernet Controllers
- ▶ Interface Speed: Four @ 10/100/1000Mbps (TSEC)
- ▶ Connector: Two Gigabit Ethernet ports routed to front panel RJ-45, two Gigabit Ethernet ports to VMEbus P2 connector, pin out matching MVME7216E RTM
- ▶ Indicators: Link status/speed/activity

## Asynchronous Serial Ports

- ▶ Port 1
  - Controller: MPC8548E DUART (second port N/C)
  - Number of Ports: One 16550 compatible
  - Configuration: EIA-232 DTE (RxD, TxD, RTS, CTS)
  - Async Baud Rate, b/s max.: 38.4K RS-232, 115Kbps raw
  - Connector: One front panel micro DB-9
  - Micro DB-9 to DB-9 adapter cable: SERIAL-MINI-D2
- ▶ Ports 2-5
  - Controller: Exar ST16C544D QUART
  - Number of Ports: Four 16550 compatible
  - Configuration: EIA-232 (RxD, TxD, RTS, CTS)
  - Async Baud Rate, b/s max: 38.4K RS-232, 115Kbps raw
  - Connector: Via VMEbus P2 connector, pinout matching MVME7216E RTM
- ▶ USB Interface (commercial temperature only)
  - Controller: NEC  $\mu$ 720101
  - Configuration: USB 2.0
  - Number of ports: One
  - Connector: One powered port routed to front panel

## Dual IEEE P1386.1 PCI Mezzanine Card Slots

- ▶ Address/Data: A32/D32/D64, PMC PN1, PN2, PN3, PN4 connectors (PN4 for PMC1 only)
- ▶ PCI Bus Clock: 33MHz, 66MHz or 100MHz PCI/PCI-X
- ▶ Signaling: +3.3V, +5V
- ▶ Power: +3.3V, +5V,  $\pm$ 12V
- ▶ Module Types: Two single-wide or one doublewide, front panel or P2 I/O, PMC and PrPMC support, PMC1 site Pn4 routed to VMEbus P2 connector rows A and C

## PCI Expansion Connector for Interface to XMCSpan Boards

- ▶ 8x PCI Express interface
- ▶ One 76-pin connector located on MVME4100 planar

## Counters/Timers

- ▶ TOD Clock Device: Maxim DS1375 I<sup>2</sup>C device with battery backup
- ▶ Cell Storage Life: 10 years at 25°C
- ▶ Cell Capacity Life: One year at 100% duty cycle, 25°C
- ▶ Removable Battery: Yes

- ▶ Real-Time Timers/Counters: Four, 32-bit programmable timers in PLD; four, 32-bit programmable/cascadable timers in MPC8548E
- ▶ Watchdog Timer: In PLD

## Board Size

- ▶ Height: 233.4mm (9.2in.)
- ▶ Depth: 160.0mm (6.3in.)
- ▶ Front Panel Height: 261.8mm (10.3in.)
- ▶ Width: 19.8 mm (0.8 in.)
- ▶ Max. Component Height: 14.8mm (0.58in.)

## Power Requirements

(Not including power required by PMC or IPMC modules)

Board Variant	Power
MVME4100-0173	Typical: 18W at +5V Maximum: 22W at +5V

## Other Features

- ▶ RoHS compliant
- ▶ Jumper-less configuration
- ▶ On-board temperature sensor
- ▶ JTAG header for connection of diagnostic tools

## Front Panel

- ▶ IEEE or SCANBE handles
- ▶ Connectors for serial, 2x Gigabit Ethernet and USB port (commercial temperature only)
- ▶ Openings for PMC sites
- ▶ Reset switch
- ▶ Status LEDs

## Estimated MTBF

MTBF estimated per Telcordia SR-332, issue 2, ground fixed, controlled environment, unit ambient air temperature of 40°C is 757,000 hours. Contact Penguin Solutions for alternative environments or temperatures.



# Transition Modules

## I/O Connectors

- ▶ MVME7216E
  - Asynchronous Serial Ports: Four, RJ-45, labeled as COM2-5
  - Ethernet: Two 10/100/1000BaseTX, RJ-45

## Non-Volatile Storage

- ▶ 8KB VPD SEEPRM

## Transition Module Size

- ▶ Height: 233.4mm (9.2in.)
- ▶ Depth: 80.0mm (3.1in.)
- ▶ Front Panel Height: 261.8mm (10.3in.)
- ▶ Front Panel Width: 19.8mm (0.8in.)

# All Modules

## Environmental

	Non-operating
Cooling Method	Forced Air
Operating Temperature	0°C to +55°C
Storage Temperature	-40°C to +85°C
Vibration Sine	1G, 5 - 200Hz
Vibration Random	N/A
Shock	N/A
Humidity	5% to 90% RH
Conformal Coating	Optional

\* Final ET shock and vibration capabilities TBD. Values shown are minimums.

## Safety

All printed wiring boards (PWBs) are manufactured with a flammability rating of 94V-0 by UL recognized manufacturers.

## Electromagnetic Compatibility (EMC)

- ▶ Intended for use in systems meeting the following regulations:
  - U.S.: FCC Part 15, Subpart B, Class A (non-residential)
  - Canada: ICES-003, Class A (non-residential)
- ▶ Penguin Edge board products are tested in a representative system to the following standards:
  - CE Mark per European EMC Directive 89/336/EEC with Amendments; Emissions: EN55022 Class B; Immunity: EN55024

Ordering Information		
Part Number	Description	Weight
MVME4100-0173-2GF	1.3GHz MPC8548E, 2G NAND flash, 2G, IEEE (ENP1)	0.46 kg
Related Products		
XMCSpan-001	XMC expansion, IEEE handles	
MVME7216E-101	RTM, new I/O on 5 row P2, 2 GIGE, 4 Serial, PIM, 6E (for use with MVME250x/3100/4100/7100)	
MVME721ET-101	Extended temp RTM, new I/O on 5 row P2, two GbE, four serial, PIM, 6E (for use with MVME250x/3100/4100/7100)	
SERIAL-MINI-D2	Serial cable - Micro D sub connector to standard DB-9	
ACC/CABLE/SER/DTE/6E	Serial cable, RD 009, 2M, 2 DTE MD/D, RJ-45 to DB-9	

## Contact Us

+1 602-438-5720

[info@penguinsolutions.com](mailto:info@penguinsolutions.com)

[www.penguinsolutions.com/edge/](http://www.penguinsolutions.com/edge/)



**Parhelia B.V.**  
[www.parheliabv.com](http://www.parheliabv.com)  
 ☎ +31(0)10 741 00 28

### About Penguin Solutions

Penguin Solutions accelerates customers' digital transformation with the power of emerging technologies in HPC, AI, and IoT with solutions and services that span the continuum of edge, core, and cloud. The company designs highly advanced infrastructure, machines and networked systems that enable the world's most innovative enterprises and government institutions to build the autonomous future, drive discovery and amplify human potential. The Penguin Edge portfolio covers system on Modules, single board computers and application-ready platforms that extend insight, intelligence, and analytical capabilities closer to where the data is generated - optimizing a range of use cases across industries and rugged environments.



Penguin Solutions is a trade name used by SMART Embedded Computing, Inc., a wholly owned subsidiary of SMART Global Holdings, Inc. Penguin Edge is a trademark owned by Penguin Computing, Inc., a wholly owned subsidiary of SMART Global Holdings, Inc. NXP is a trademark of NXP B.V. All other logos, trade names, and trademarks are the property of their respective owners. Specifications are subject to change without notice. For full legal terms and conditions, please visit [www.penguinsolutions.com/edge/legal/](http://www.penguinsolutions.com/edge/legal/).

©2023 SMART Embedded Computing, Inc.