

## 15.6" Industrial Touch Panel PC with Intel® Core™ U-Series / Celeron® Processor

### Overview


The DPC-9156 series is a 15.6" fanless industrial panel PC based on the Intel® Core™ U-Series / Celeron® processor. It features a modular design to allow easy CPU board or I/O board upgrades to fulfill customer needs. The DPC-9156 series offers low-power consumption, rich I/O connectivity, and Wi-Fi module expansion. It boasts a sleek design with an IP65 aluminum alloy front panel and a durable metal body, offering superior heat dissipation and high reliability for operation in harsh industrial environments. The DPC-9156 series is an excellent HMI platform for industrial applications and factory automation.

### Features

- 15.6" LED-backlit LCD with capacitive or resistive touch screen
- Rugged aluminum enclosure and fanless design
- Intel® Core™ U-Series / Celeron® processor
- 2 x COM, 4 x USB, 2 x LAN, 1 x VGA, 1 x HDMI
- Supports Wi-Fi, 4G
- VESA 100 mount and panel mount compatibility
- IP65 compliant front panel



### I/O Interfaces

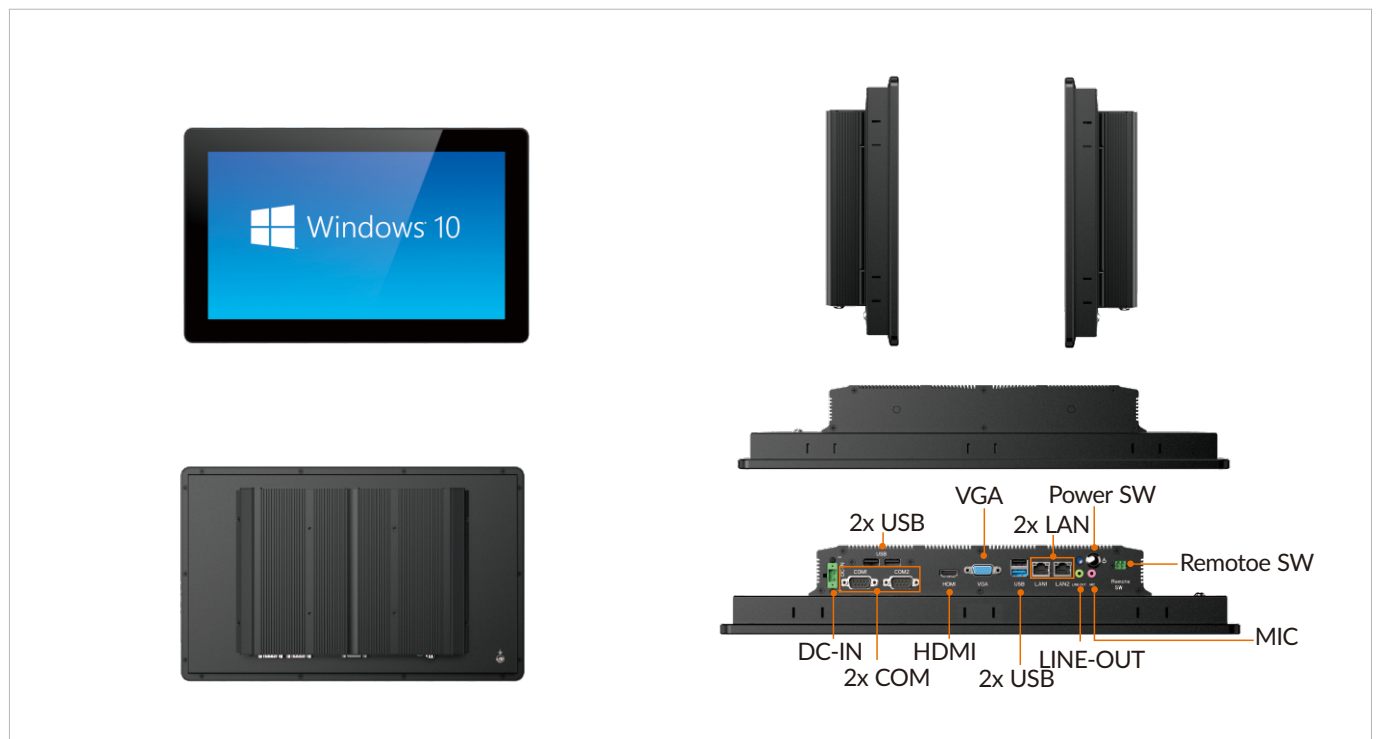

## Specifications

Display	DPC-9156-J6412	DPC-9156-6200U	DPC-9156-10210U	DPC-9156-10710U
Size	15.6 inch			
Touch Type	Projected capacitive multi touch 5-wire resistive touch			
Transmittance	87% (capacitive) / 80% (resistive)			
Control Interface	USB			
Surface Hardness	≥7H/≥3H			
Resolution	1920 x 1080			
Luminance	450 nits			
Contrast Ratio	1000: 1			
View Angles	85 (left), 85 (right), 85 (up), 85 (down)			
LED Lifetime	50,000 hrs			
Color	16.7M			
<b>System</b>				
CPU	Intel® Celeron® J6412 (2.0 GHz) processor	Intel® Core™ i5-6200U (2.3 GHz) processor	Intel® Core™ i5-10210U (1.6 GHz) processor	Intel® Core™ i7-10710U (1.1 GHz) processor
Memory	1 x SO-DIMM DDR4- 3200MHz, up to 16GB	2 x SO-DIMM DDR3- 1600MHz, up to 16GB	2 x SO-DIMM DDR4- 2666MHz, up to 32GB	2 x SO-DIMM DDR4- 2666MHz, up to 32GB
Storage	1 x 2.5" SATA HDD/SSD (optional) 1 x full length Mini PCIe for mSATA SSD			
<b>I/O Ports</b>				
USB	2 x USB 3.0, 2x USB 2.0			
Serial	2 x COM (COM1 supports RS-232, COM2 supports RS-232/422/485)			
Ethernet	2 x GbE LAN			
Display	1 x HDMI, 1 x VGA			
SIM Card Slot	1 x SIM slot for 4G (optional)			
Antenna	2 x SMA antenna holes			
<b>Expansion Slot</b>				
Mini PCIe	1 x full length Mini PCIe for Wi-Fi 1 x full length Mini PCIe for mSATA			
<b>RF Communication</b>				
Wi-Fi	Mini PCIe expansion (optional)			
Cellular	Mini PCIe expansion (optional)			
Bluetooth	Mini PCIe expansion (optional)			
<b>Audio</b>				
Audio	Mic in, line out			
Speaker	2Ω5W speaker (optional)			
<b>Power</b>				
Button	YES			
Remote Power On/Off	1x Remote switch connector			
DC Input	12VDC (9-36VDC optional)			
Power Connector	M8			
Power Consumption	25W	28W		
Power Adaptor	AC-DC, 12V@5A, 60W		AC-DC, 12V@7A, 84W	
<b>Operating System</b>				
Windows	Windows 10/11	Windows 7/10	Windows 10/11	
<b>Mechanical</b>				
Dimensions (W x D x H)	399 x 249 x 70 mm (15.7 x 9.8 x 2.7 inches)			
Weight (N.W.)	5.9 kg (13 lbs)			
Mounting	Panel mount, wall mount bracket VESA 100			
Material	Aluminum alloy panel, all-metal chassis			

Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	10% to 95% @ 40°C (104°F), non-condensing
Vibration	5-500Hz, 0.026 G <sup>2</sup> /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (for front panel)
Certification	
EMC	CE, FCC
Packing List	
Packing	1 x DPC-9156 1 x AC-DC power adapter 10 x panel mounting buckles 1 x warranty card

## Dimensions

